

Tight Buffered

2 through 144 fibers

FIBER

HITACHI Inspire the Next

Product Highlights

- REACH & RoHS 2 compliant.
- Made in USA.
- All multimode, and singlemode cables (except OM1) utilize bend-insensitive optical fibers.
- UV and fungus resistant jacket.
- Tight buffered construction.
- Each fiber is color coded for easy identification.
- Dry, super absorbent polymers (SAPs) eliminate water migration in cable interstices.
- Suitable for lashed aerial, duct, underground conduit and indoor riser applications.
- 900um buffered design recommended for easy termination.
- Cables with more than 24 fibers have fibers segregated into 12-fiber sub-units.

Options

- Low smoke zero halogen (LSZH) available.
- Enhanced bend insensitive OS2 optical fiber is available (ITU-T G.657.B3 & G.657.A2).
- OM4+ optical fibers with extended 10 gigabit Ethernet distances are available.

Applications

- Applications include 10, 40 & 100 gigabit Ethernet, Fibre Channel, Video, Security, Automation.
- OM5 supports applications utilizing Short Wave Division Multiplexing (SWDM).

Standards

- TIA/EIA-568-C.3
- ISO/IEC 11801, 2nd edition
- Telcordia GR-409-CORE

Indoor/Outdoor Tight Buffered (Riser)

(UL) OFNR c(UL) OFNR FT4

PART NUMBERS BY FIBER COUNT

FIBERS	FIBERS PER TUBE	62.5 UM OM1	50 UM OM2	50 UM OM3	50 UM OM4	50 UM OM5	8.3 UM OS2
2	2	61345-2	61347-2	61348-2	61893-2	62766-2	61349-2
4	4	61345-4	61347-4	61348-4	61893-4	62766-4	61349-4
6	6	61345-6	61347-6	61348-6	61893-6	62766-6	61349-6
8	8	61345-8	61347-8	61348-8	61893-8	62766-8	61349-8
10	10	61345-10	61347-10	61348-10	61893-10	62766-10	61349-10
12	12	61345-12	61347-12	61348-12	61893-12	62766-12	61349-12
24	24	61345-24	61347-24	61348-24	61893-24	62766-24	61349-24
36	6	61380-36	61376-36	61523-36	61899-36	62767-36	61415-36
48	12	61495-48	61522-48	61524-48	61898-48	62768-48	61363-48
72	12	61495-72	61522--72	61524-72	61898-72	62768-72	61363-72
96	12	61495-96	61522--96	61524-96	61898-96	62768-96	61363--96
144	12	61495-144	61522--144	61524-144	61898-144	62768-144	61363-144

SPECIFICATIONS BY FIBER COUNT

FIBERS	FIBERS/TUBE	TUBE LAYOUT	CABLE O.D.		RECOMMENDED MAXIMUM LOADS				CABLE WEIGHT	
			in.	mm	INSTALL		OPERATION		lbs/1000 ft	kg/1000m
					lbs-f	N	lbs-f	N		
2	2	x	.190	4.83	128	570	38	171	12.6	18.8
4	4	x	.190	4.83	128	570	38	171	13.9	20.7
6	6	x	.190	4.83	128	570	38	171	15.1	22.5
8	8	x	.230	5.84	160	712	48	214	20.0	29.8
10	10	x	.230	5.84	160	712	48	214	21.3	31.7
12	12	x	.230	5.84	160	712	48	214	22.5	33.5
24	24	x	.330	8.38	288	1282	86	385	50.2	74.8
36	6	6xC5M	.639	16.2	600	2670	200	890	159.2	236.9
48	12	4xC5M	.627	15.9	640	2849	192	855	135.1	201.1
72	12	6xC5M	.756	19.2	960	4273	288	1282	226.6	337.2
96	12	8xC5M	.941	23.9	1280	5696	384	1709	367.9	547.6
144	12	9x3xC5M	1.072	27.2	1920	8546	576	2564	396.8	590.5

Cable Characteristics

Note: Part number rows in upper table directly correspond to cable characteristic rows in the same location of the lower table.

Tight Buffered

Indoor/Outdoor Tight Buffered (Riser)

(UL) OFNR c(UL) OFNR FT4

Optical Specifications

TIA/EIA-568-C.3 | ISO/IEC 11801, 2nd edition | Telcordia GR-409-CORE

Fiber type	Max. Attenuation (dB/km)		Min OFL Bandwidth (MHz-km)		Min EMBC Bandwidth (MHz-km)		Gb Ethernet distance (m)		10 Gb Ethernet distance (m)	
	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)	850nm (MM)	1300nm (MM)
OM1	3.5	1.0	200	500	220	N/A	300	550	33	N/A
OM2	3.0	1.0	700	500	950	N/A	750	550	150	N/A
OM3	3.0	1.0	1500	500	2000	N/A	1000	550	300	N/A
OM4	3.0	1.0	3500	500	4700	N/A	1100	550	550	N/A
OM5*	3.0	1.0	3500	500	4700	N/A	1100	550	550	N/A
	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)	1310nm (SM)	1550nm (SM)
OS2	0.5	0.5	N/A	N/A	N/A	N/A	> 25,000	> 40,000	10,000 - 25,000	40,000


Hitachi Cable America reserves the right to revise any specifications.

*OM5 optical fiber tested by glass manufacturer and exceeds the requirements of all applicable industry standards.

Cable Temperature Ranges

Storage: -40° to 70°C (-40° to 158°F)
 Installation: -10° to 60°C (14° to 140°F)
 Operating: -40° to 70°C (-40° to 158°F)

Features

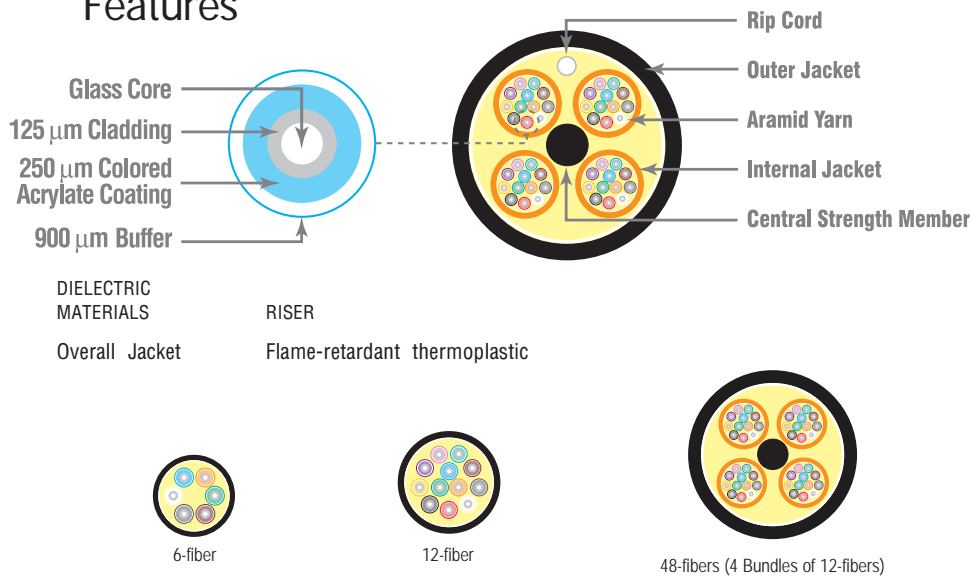

Mechanical Specifications

- Bend radius, no load = 10x cable overall diameter
- Bend radius, load = 20x cable overall diameter



FIBER

